


TECHNICAL CHARACTERISTICS

OENOLOGICAL STORAGE TANKS ON REINFORCED CONCRETE BASE

LEGEND – CLASS ACCESSORIES

5	Air valve with double effect PVC until 250 hl, beyond stainless steel
7	Central top manhole Ø400 H structure =60 mm
8	Supporting legs AISI 304
9	Level indicator outlet
10	Level indicator outlet pipe
11	Level indicator inlet
12	Level indicator
13	Ball valve for partial draining AISI 304
15	Tank for full draining
17	Ball valve for full draining AISI 304
18	Raising lugs
19	Handle bar for manhole access
27	Manufacturer plate
28	Elliptical manhole Ø440x305 mm
29	Sample groups

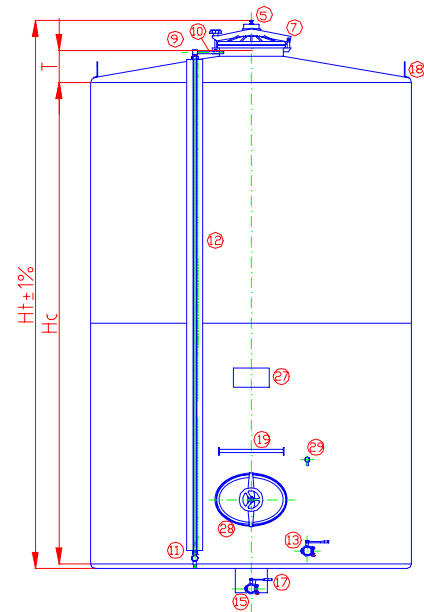

(* Butterfly Finishing: 2B

CAPACITY		Diameter Tank	HEIGHT				THICKNESS (*)			Valve ø	Total Weight
Nom.	Real		Cylinder HC	Top T	manhole C	TOT Ht	Ferrules	Top	Bottom		
hl	hl	mm.	mm.	mm.	mm.	mm.	mm.	mm.	mm.	kg.	
50	50,0	1592	2500	160	90	2750	1,5	1,5	1,5	50	213
100	101,0	1990	3000	200	90	3290	1,5	1,5	1,5	50	328
150	151,0	2388	3250	240	150	3640	1,5	1,5	1,5	60	436
200	200,3	2500	4000	260	150	4410	2-1,5	1,5	2,0	60	615
250	249,5	2500	5000	260	150	5410	2-1,5	1,5	2,0	60	732
300	310,0	2500	6250	280	150	6680	2-1,5	1,5	2,0	60	842
350	348,0	2500	7000	300	150	7450	2-1,5	1,5	2,0	80	966
400	382,5	2500	7500	280	150	7930	2-1,5	1,5	2,0	80	999
450	435,0	2950	6250	300	150	6700	2-1,5	1,5	2,5	80	1023
500	512,0	2950	7500	300	150	7950	2-1,5	1,5	2,5	80	1309
600	597,0	2950	8750	300	150	9200	2,5-2-1,5	2,0	3,0	80	1442
700	683,0	2950	10000	300	150	10450	2,5-2-1,5	2,0	3,0	80	1674
800	841,0	3500	8750	320	200	9270	2,5-2	2,0	3,0	80	1815
900	865,0	3500	9000	360	200	9560	2,5-2	2,0	3,0	80	2159
1000	1009,7	3500	10500	360	200	11060	2,5-2	2,0	3,0	80	2426