


TECHNICAL CHARACTERISTICS

FERMENTER STANDING ON LEGS WITH FLAT SLOPING
BOTTOM (3% INCLINATION)WITH INSULATED BUCKLED PLATES
COLLING JACKET

LEGEND – CLASS ACCESSORIES

5	Air valve with double effect PVC until 250 hl, beyond stainless steel
7	Central top manhole Ø400 H structure =60 mm
8	Supporting legs AISI 304
9	Level indicator outlet
10	Level indicator outlet pipe
11	Level indicator inlet
12	Level Indicator
13	Valve for partial draining AISI 304
17	Valve for full draining AISI 304
18	Raising lugs
20	Pumping over pipe with end fitting
27	Manufacturer plate
29	Sample valve
30	Digital thermometer
32	Rectangular manhole with outwards opening
43	Buckled plates thermal exchange surface
49	Static sparger
53	Bottom reinforcement
62	Drill holder

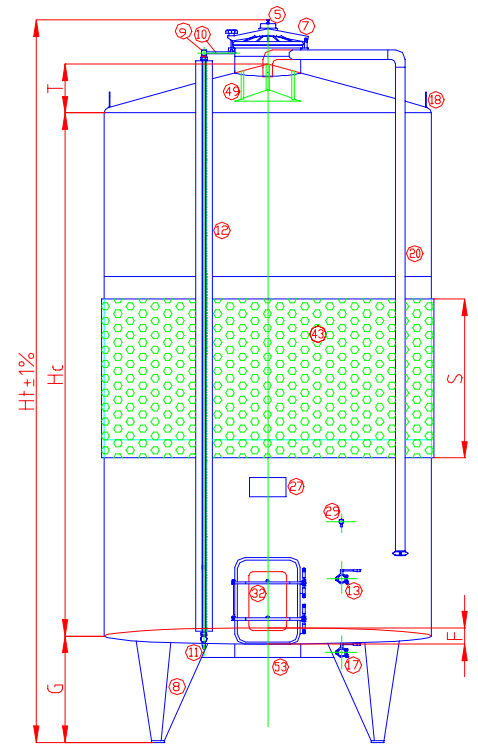

(*)Butterfly Finishing : 2B

CAPACITY		Diameter Vat	HEIGHT					THICKNESS (*)			Valve Ø	Buckled plates S
Nom	Real		Cylinder HC	Top T	Inclination F	Legs G	Total Height	Ferrules	Top	Bottom		
hl	hl	mm	mm	mm	%	mm	mm	mm	mm	mm	mm	mm
20	20,4	1194	1800	120	3	470	2700	2,0	1,5	2,0	40	970
25	25,4	1194	2250	120	3	470	3150	2,0	1,5	2,0	40	970
30	30,3	1433	1850	140	3	600	2900	2,0	1,5	2,0	40	970
40	40,4	1592	2000	160	3	600	3070	2,0	1,5	2,5	40	970
50	50,4	1592	2500	160	3	600	3570	2,0	1,5	2,5	40	970
60	60,3	1592	3000	160	3	600	4070	2,0	1,5	2,5	50	970
80	80,8	2000	2500	300	3	600	3710	2,0	1,5	3,0	50	970
100	104,3	2000	3250	300	3	600	4460	2,0 - 1,5	1,5	3,0	50	970
150	158,8	2388	3500	240	3	600	4650	2,0 - 1,5	1,5	3,0	60	970
200	211,0	2500	4250	260	3	750	5570	2,0 - 1,5	2,0	3,5	60	970
250	260,2	2500	5250	260	3	750	6570	2,0 - 1,5	2,0	3,5	60	1220
300	309,3	2500	6250	260	3	750	7570	2,0 - 1,5	2,0	3,5	60	1220