


TECHNICAL CHARACTERISTICS

**FERMENTER STANDING ON LEGS
WITH FLAT SLOPING BOTTOM
3% INCLINATION**

LEGEND – CLASS ACCESSORIES

5	Air valve with double effect PVC until 250 hl, beyond stainless steel
7	Central top manhole Ø400 H structure =60 mm
8	Supporting legs AISI 304
9	Level indicator outlet
10	Level indicator outlet pipe
11	Level indicator inlet
12	Level Indicator
13	Valve for partial draining AISI 304
17	Valve for full draining AISI 304
18	Raising lugs
20	Pumping over pipe with end fitting
27	Manufacturer plate
29	Sample valve
32	Rectangular manhole with outwards opening
49	Static sparger
53	Bottom reinforcement

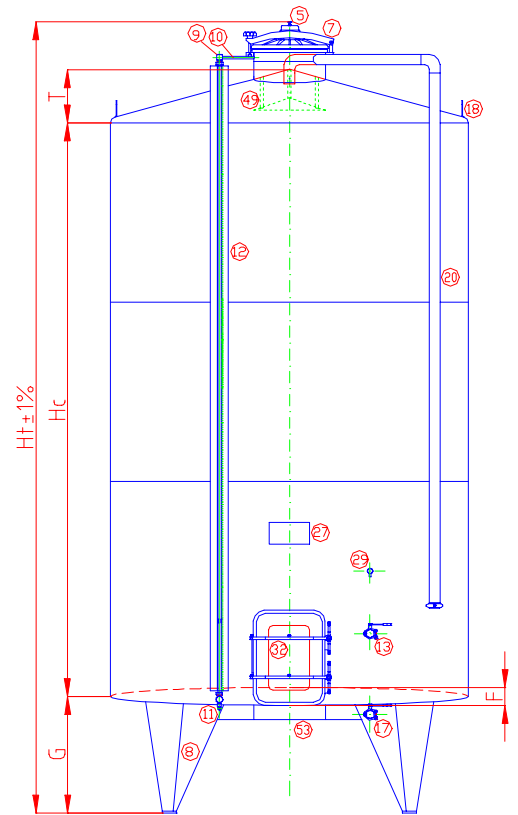

(*)Butterfly Finishing: 2B

CAPACITY		Diameter vat	HEIGHT					THICKNESS (*)			Valve Ø	Total Weight
Nom.	Real		Cylinder HC	Top T	Inclination F	Legs G	TOT Height	Ferrules	Top	Bottom		
hl	hl	mm	mm	mm	%	mm	mm	mm	mm	mm	mm	kg
20	20,4	1194	1800	120	3	470	2700	1,5	1,5	2,0	40	166
25	25,4	1194	2250	120	3	470	3150	1,5	1,5	2,0	40	187
30	30,3	1433	1850	140	3	600	2900	1,5	1,5	2,0	40	206
40	40,4	1592	2000	160	3	600	3070	1,5	1,5	2,5	40	255
50	50,4	1592	2500	160	3	600	3570	1,5	1,5	2,5	40	285
60	60,3	1592	3000	160	3	600	4070	1,5	1,5	2,5	50	335
80	80,8	2000	2500	300	3	600	3710	1,5	1,5	3,0	50	414
100	104,3	2000	3250	300	3	600	4460	1,5	1,5	3,0	50	471
150	158,8	2388	3500	240	3	600	4650	1,5	1,5	3,0	60	642
200	211,0	2500	4250	260	3	750	5570	2-1,5	2,0	3,5	60	864
250	260,2	2500	5250	260	3	750	6570	2-1,5	2,0	3,5	60	978
300	309,3	2500	6250	260	3	750	7570	2-1,5	2,0	3,5	60	1087