


TECHNICAL FEATURES

SPARKLING WINE AUTOCLAVES

KEY- STANDARD ACCESSORIES

A	Washing tube complete with spray ball
B	Visual level indicator, Ø20mm
C	Digital thermometer Ø1/2"x400mm
D	Ball valve DIN 50 for stirrer
E	Probe holder Ø 1/2"x400mm
F	Ball valve DIN 50 for partial discharge
G	Elliptical door 504x480mm inward opening
H	Ball valve DIN 50 for total discharge
L	Threaded connection for CO ₂
M	Sample valve group DIN 20
N	Vent valv
P	Manometer
Q	Safety group (safety valve, pressure gauge, drain cock)
R	Drain valve
8	Support legs AISI 304 with adjustable feet
18	Lifting lugs
27	Manufacturer's data plate
33	Thermally insulated rectangular door
43	Spiral heat exchange surface
45	Insulation in expanded polyurethane th. = 100 mm

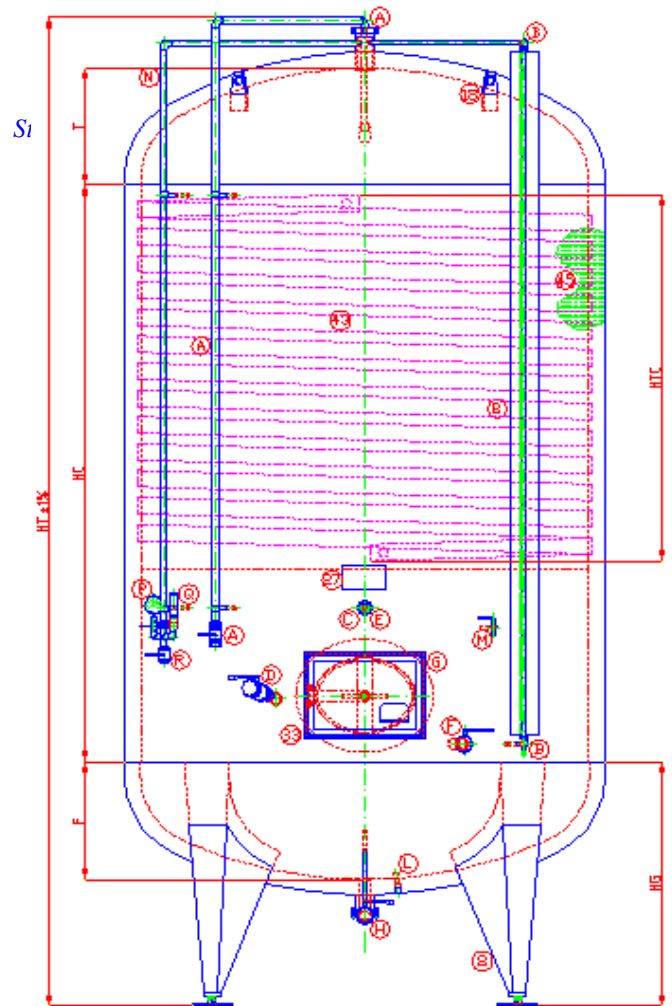

CAPACITY		Tank Diameter D	Insulation Diameter	HEIGHTS					Valve DIN
Nom.	Eff.			C.Cil HC	Top T	Bottom F	Legs G	TOT Ht	
hl	hl	mm	mm	mm	mm	mm	mm	mm	
25	27,25	1194	1394	2000	320	320	750	3350	50
50	51,38	1592	1792	2000	430	430	850	3550	50
100	105,95	1850	2050	3250	495	495	1000	5150	50
150	151,85	2250	2450	3000	600	600	1200	5100	50