

# TECHNICAL FEATURES


## TANKS WITH DIMPLE PLATE JACKET ON LEGS

### KEY- STANDARD ACCESSORIES

5	Breathing valve double sense PVC up to 250 hl, over inox
7	Upper central manhole Ø400 H frame=60 mm
8	Support legs AISI 304 with adjustable feet
9	Upper level holder
10	Tube for level return
11	Lower level holder
12	Level indicator
13	Ball valve for partial discharge
17	Ball valve for total discharge
18	Lift lugs
27	Manufacturer's data plate
28	Elliptical door Ø440x305 mm
29	Sample valve group
30	Digital thermometer
43	Dimpled plate jacket exchange surface
62	Probe well

Sheet's finish: 2B

Available on request finish flowered, satin and lucid.

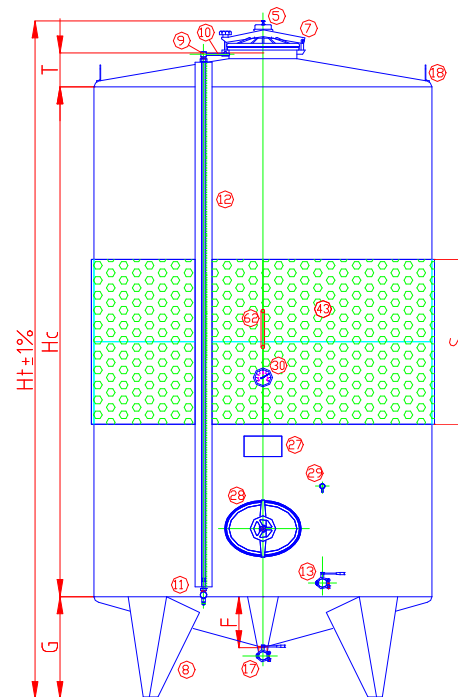

CAPACITY		Tank Diameter D	HEIGHTS					Valve Ø
Nom.	Eff.		C.Cil HC	Top T	Bottom F	Legs	TOT Ht	
hl	hl	mm	mm	mm	mm	mm	mm	mm
14	14,9	1194	1250	120	120	470	<b>2050</b>	40
20	20,5	1194	1750	120	120	470	<b>2550</b>	40
25	25,1	1194	2160	120	120	470	<b>2960</b>	40
30	30,5	1433	1800	140	140	600	<b>2750</b>	40
40	41,9	1592	2000	160	160	600	<b>2970</b>	40
50	51,9	1592	2500	160	160	600	<b>3470</b>	40
60	62,0	1592	3000	160	160	600	<b>3970</b>	50
80	82,9	1990	2500	200	300	700	<b>3710</b>	50
100	100,5	2000	3000	300	300	700	<b>4210</b>	50
120	122,4	2200	3000	220	440	750	<b>4180</b>	50
150	156,3	2388	3250	240	480	750	<b>4450</b>	60
200	208,8	2500	4000	260	500	850	<b>5320</b>	60
250	257,9	2500	5000	260	500	850	<b>6320</b>	60
300	307,0	2500	6000	260	500	850	<b>7320</b>	60
350	356,4	2500	7000	260	500	850	<b>8320</b>	80
400	413,5	2950	5750	300	600	850	<b>7110</b>	80
450	464,8	2950	6500	300	600	850	<b>7860</b>	80
500	516,0	2950	7250	300	600	850	<b>8610</b>	80
600	601,5	2950	8500	300	600	850	<b>9860</b>	80