


# TECHNICAL CHARACTERISTICS

## OENOLOGICAL TANKS WITH BUCKLED PLATES

### COOLING JACKET

#### LEGEND- CLASS ACCESSORIES

5	Air valve with double effect PVC until 250 hl, beyond stainless steel
7	Central top manhole Ø400 H structure =60 mm
8	Supporting legs AISI 304
9	Level indicator outlet
10	Level indicator outlet pipe
11	Level indicator inlet
12	Level indicator
13	Ball valve for partial draining AISI 304
17	Ball valve for full draining AISI 304
18	Raising lugs
27	Manufacturer plate
28	Elliptical manhole Ø440x305 mm hence 20 hl
29	Sample groups hence 15hl
30	Digital thermometer
43	Buckled plates thermal exchange surface
62	Drill holder

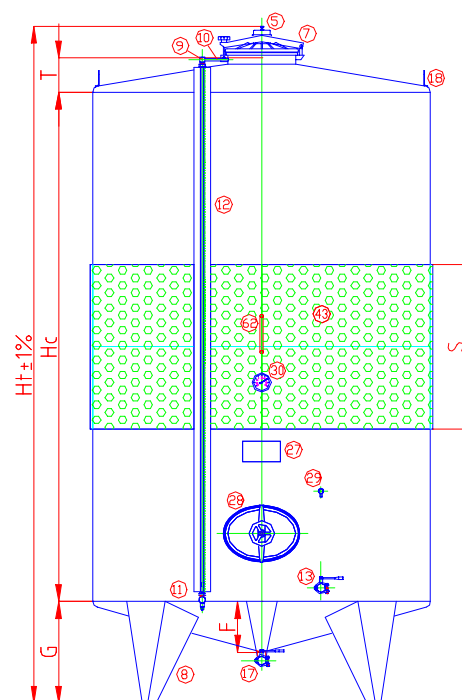

(\* Butterfly Finishing: 2B

CAPACITY		Diameter Tank	HEIGHT					THICKNESS (*)			Valve Ø	Buckled Plates S
Nom.	Real		Cylinder HC	Top T	Bottom F	Legs G	TOT Ht	Ferrules	Top	Bottom		
hl	hl	mm	mm	mm	mm	mm	mm	mm	Mm	mm	mm	mm
14	14,9	1194	1250	120	120	470	2050	2,0	1,5	1,5	40	730
20	20,5	1194	1750	120	120	470	2550	2,0	1,5	1,5	40	970
25	25,1	1194	2160	120	120	470	2960	2,0	1,5	1,5	40	970
30	30,5	1433	1800	140	140	600	2750	2,0	1,5	1,5	40	970
40	41,9	1592	2000	160	160	600	2970	2,0	1,5	1,5	40	970
50	51,9	1592	2500	160	160	600	3470	2,0	1,5	2,0	40	970
60	62,0	1592	3000	160	160	600	3970	2,0	1,5	2,0	50	970
80	82,9	1990	2500	200	300	600	3510	2,0	1,5	2,0	50	970
100	100,5	2000	3000	300	300	600	4110	2,0	1,5	2,0	50	970
120	122,4	2200	3000	220	440	750	4180	2,0	1,5	2,5	50	970
150	156,3	2388	3250	240	480	750	4450	2,0-1,5	1,5	2,5	60	970
200	208,8	2500	4000	260	500	850	5320	2,0-1,5	2,0	3,0	60	970
250	257,9	2500	5000	260	500	850	6320	2,0-1,5	2,0	3,0	60	1220
300	307,0	2500	6000	260	500	850	7320	2,0-1,5	2,0	3,0	60	1220
350	356,4	2500	7000	260	500	850	8320	2,5-2,0-1,5	2,0	3,0	80	730+730
400	413,5	2950	5750	300	600	850	7110	2,5-2,0-1,5	2,0	4,0	80	1220
450	464,8	2950	6500	300	600	850	7860	2,5-2,0-1,5	2,0	4,0	80	1220
500	516,0	2950	7250	300	600	850	8610	3,0-2,5-2,0-1,5	2,0	4,0	80	730+730
600	601,5	2950	8500	300	600	850	9860	3,0-2,5-2,0-1,5	2,0	4,0	80	730+730