

TECHNICAL FEATURES


FLOATING LID TANK ON LEGS

KEY- STANDARD ACCESSORIES

8	Support legs AISI 304 with adjustable feet
12	Level indicator
13	Ball valve for partial discharge
16	Total discharge support pipe
17	Ball valve for total discharge
18	Lift lugs
27	Manufacturer's data plate
29	Sample valve group
63	Manual pump for floating roof air chamber
64	Floating roof
69	Floating roof support

Sheet finish: 2B

Available on request finish flowered, satin and lucid.

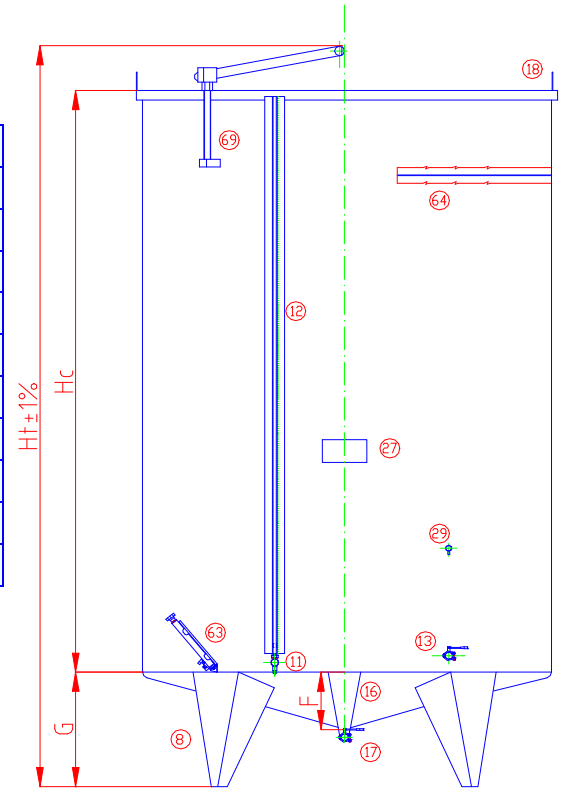

CAPACITY		Tank Diameter	HEIGHTS				Valve Ø
Nom.	Eff.		C.Cil HC	Bottom F	Legs G	TOT Ht	
hl	hl	mm	mm	mm	mm	mm	mm
7	7,79	980	1000	100	380	1680	30
10	11,60	980	1500	100	380	2180	30
14	14,40	1194	1250	120	470	2020	40
20	20,60	1194	1800	120	470	2570	40
25	25,60	1194	2250	120	470	3020	40
30	30,60	1433	1850	140	600	2750	40
40	40,90	1592	2000	160	600	2900	40
50	50,80	1592	2500	160	600	3400	40
60	60,80	1592	3000	160	600	3900	50
80	81,70	2000	2500	300	700	3500	50
100	105,20	2000	3250	300	700	4250	50
150	157,60	2200	4000	440	750	5050	60