


TECHNICAL FEATURES

ROTARY WINE FERMENTERS

KEY- STANDARD ACCESSORIES

1	Dished bottom	12	Safety Valve
2	Truncated-conical bottom	13	Sight glass
3	Wheels	14	Sample valve
4	Support frame	15	Protective carter
5	Digital thermometer	16	Gearmotor group
6	Pomace unloading door	17	Helical screw
7	Rotational joint	18	Internal septa
8	Breathing valve	19	Draining grilled surface
9	Upper door	20	Programmable electrical panel
10	Total drain valve	21	Thermoregulation surface
11	Partial drain valve	22	Insulation

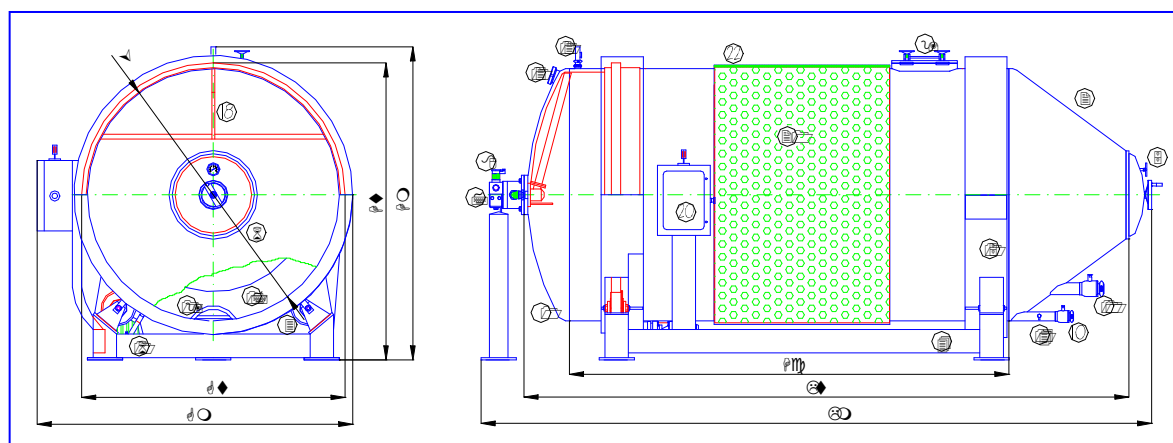

CAPACITY		DIMENSIONS					Download Diameter	Total down load valve	Partial down load valve	Exch. Surface	Insulat. Surface	Extra exch.	Extra Insulat.	Wei. TOT
Nom	Eff.	Un Diameter	Cylinder Hc	Height Ht / Hm	Width Gt / Gm	Length Lt / Lm								
hl	hl	mm	mm	mm	mm	mm	mm	mm	mm	m ²	m ²	m ²	m ²	kg
50	50,8	1704	1500	2085/2170	1845/2380	3195/3505	750	GAR 60	GAR.80	2,40	2,77	0	0	2510
105	107,4	2150	2250	2570/2640	2250/2695	4030/4315	750	GAR 60	GAR.80	8,44	8,67	0	0	2870
160	161,9	2150	3750	2570/2640	2250/2695	5530/5815	750	GAR 60	GAR.80	10,13	10,41	3,37	3,47	3230
240	243,6	2150	6000	2570/2640	2250/2695	7780/8065	750	GAR 60	GAR.80	13,50	20,83	6,75	6,94	3750
295	298,1	2150	7500	2570/2640	2250/2695	9280/9565	750	GAR 60	GAR.80	16,88	20,83	16,88	13,89	4100
345	347,6	2830	4500	3415/3500	3030/3480	6925/7325	930	GAR 60	GAR.80	13,30	18,15	4,40	0	7160
440	441,9	2830	6000	3415/3500	3030/3480	8425/8825	930	GAR 60	GAR.80	17,78	27,24	17,78	9,07	8520
540	543,0	2830	7500	3415/3500	3030/3480	9925/10325	930	GAR 60	GAR.80	26,67	40,86	13,33	0	9980